



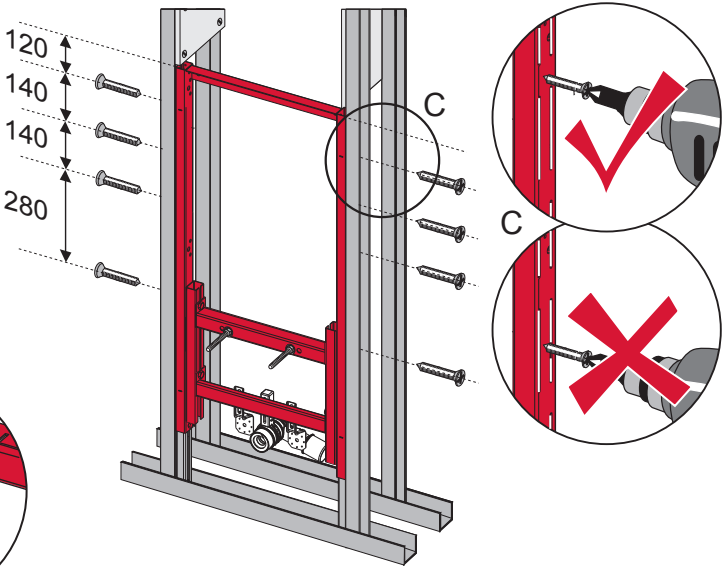
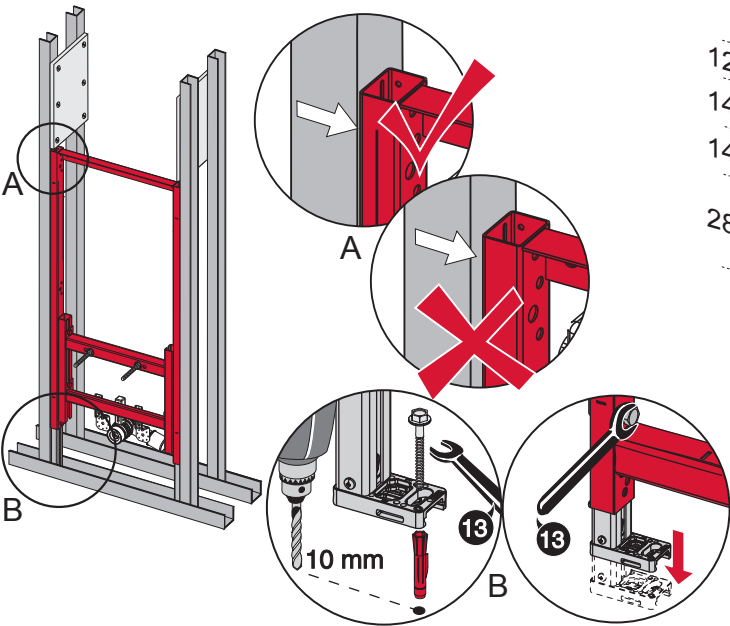
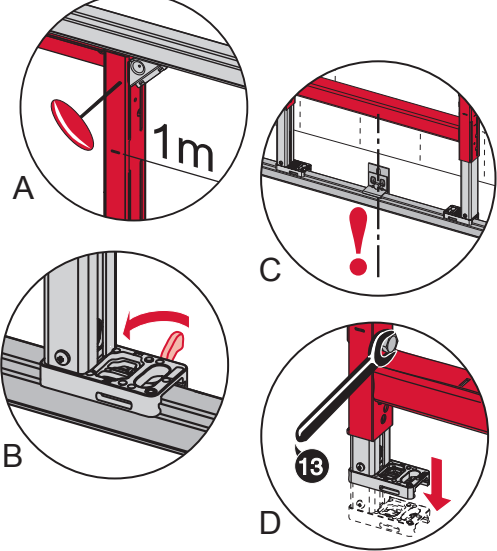
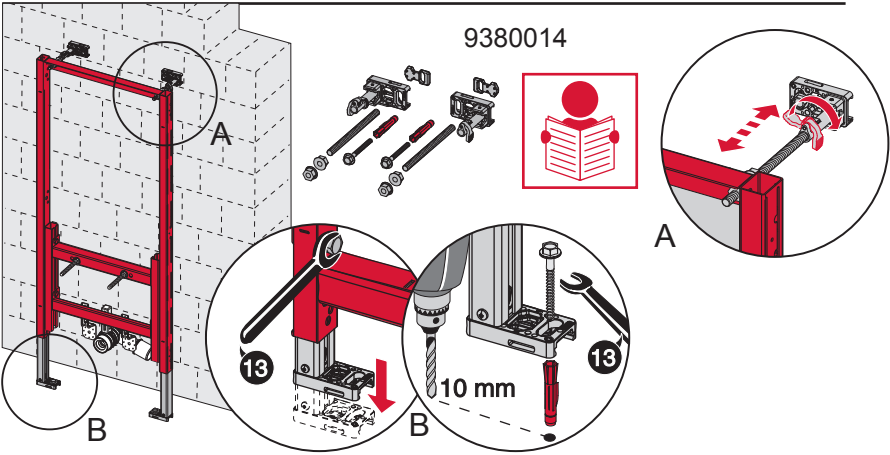
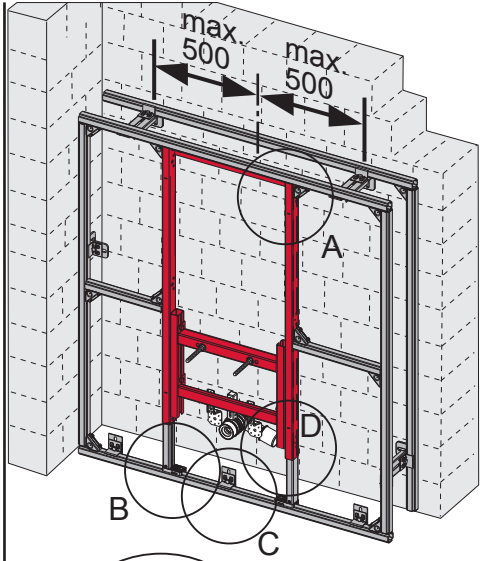
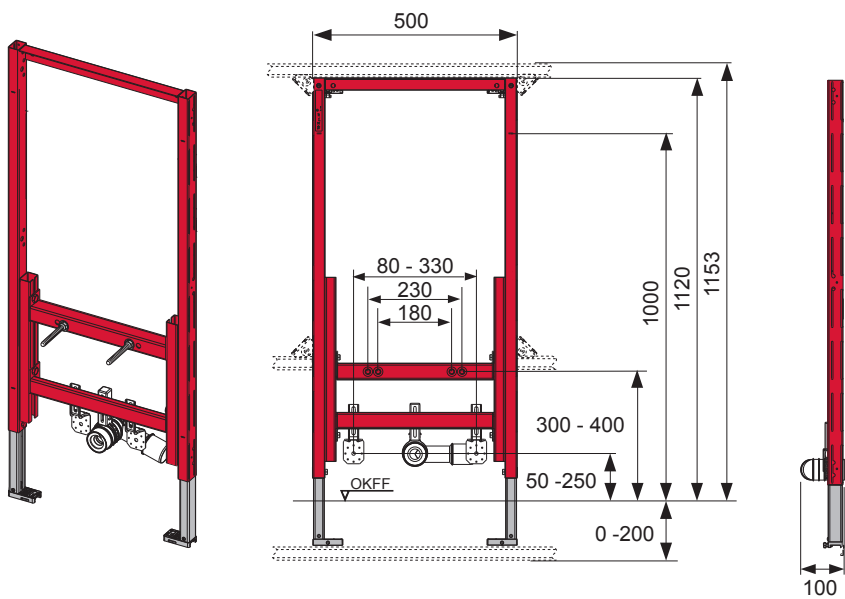
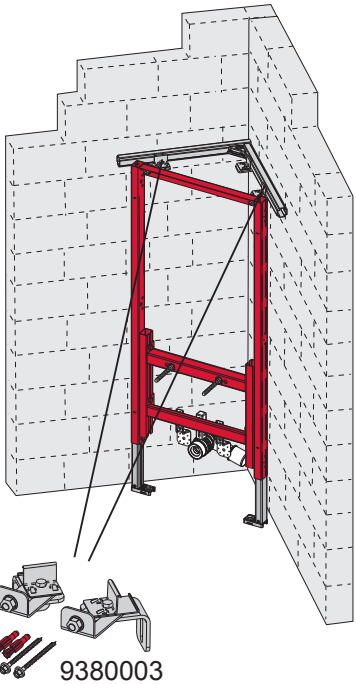
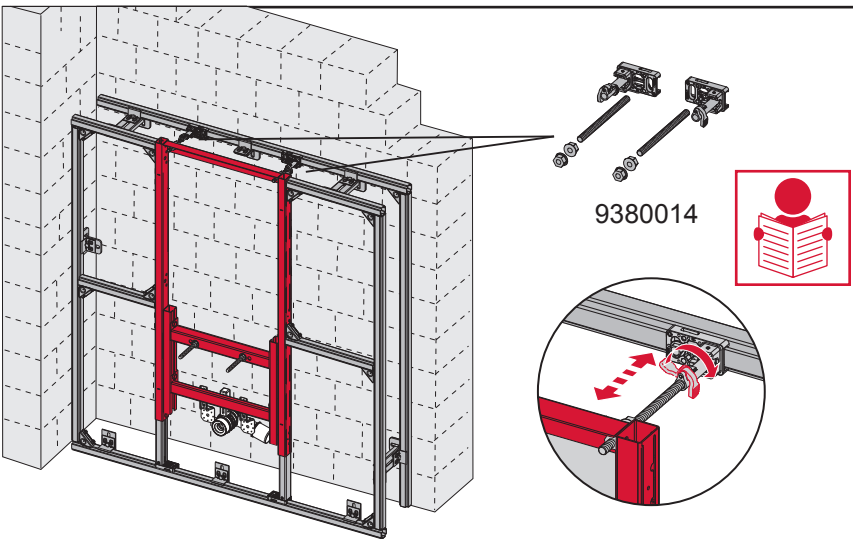

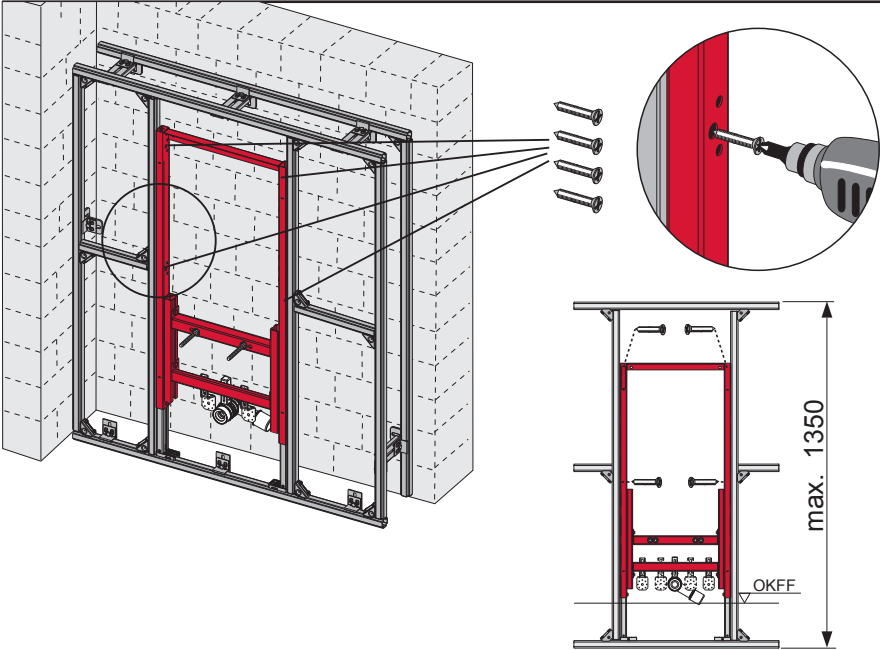





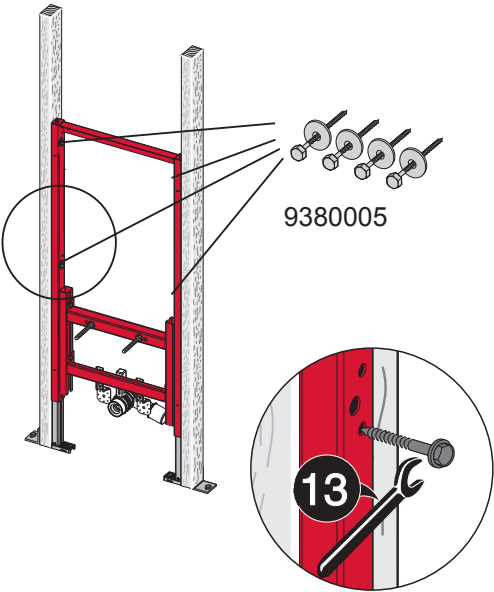






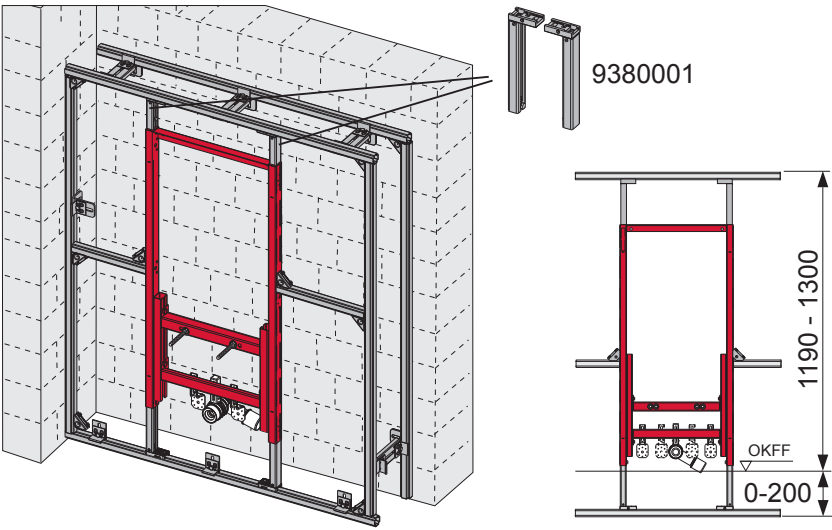



PR230 085 00 d

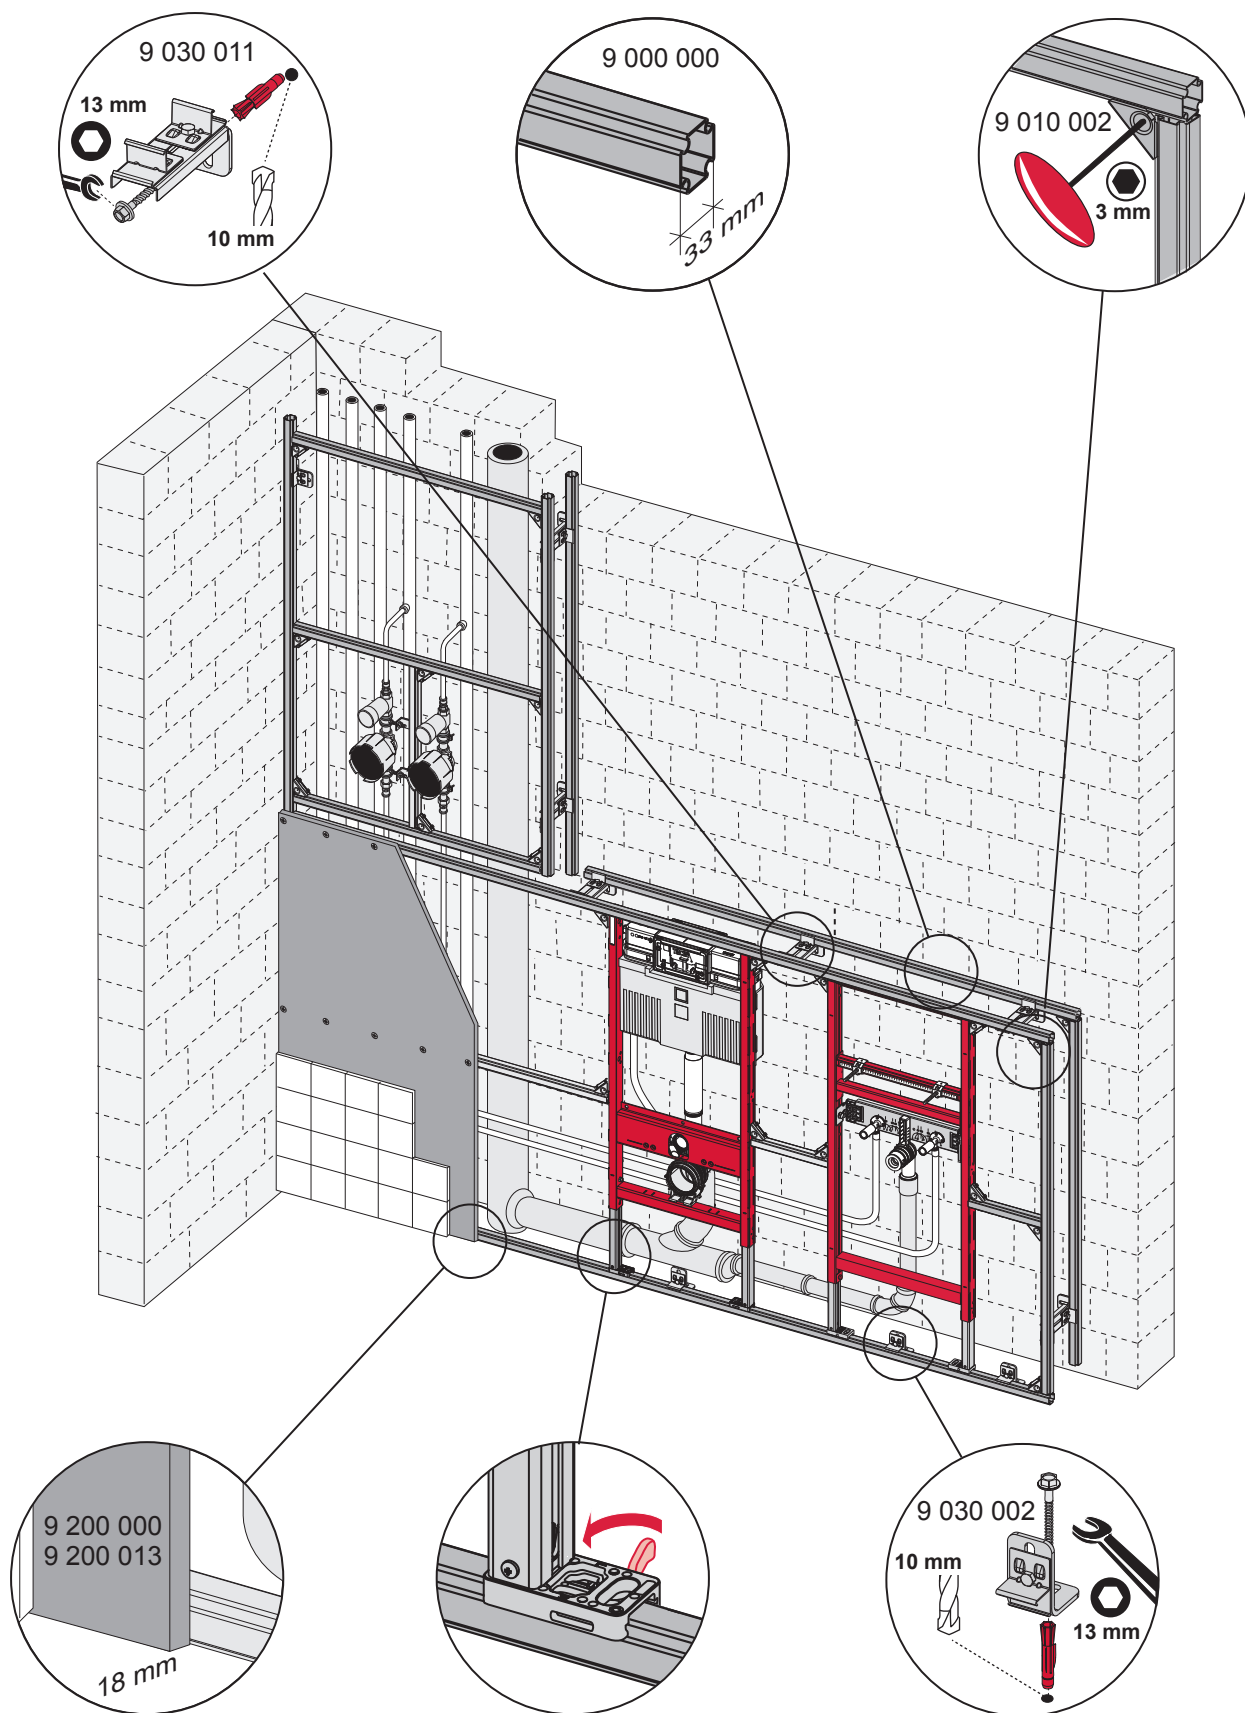


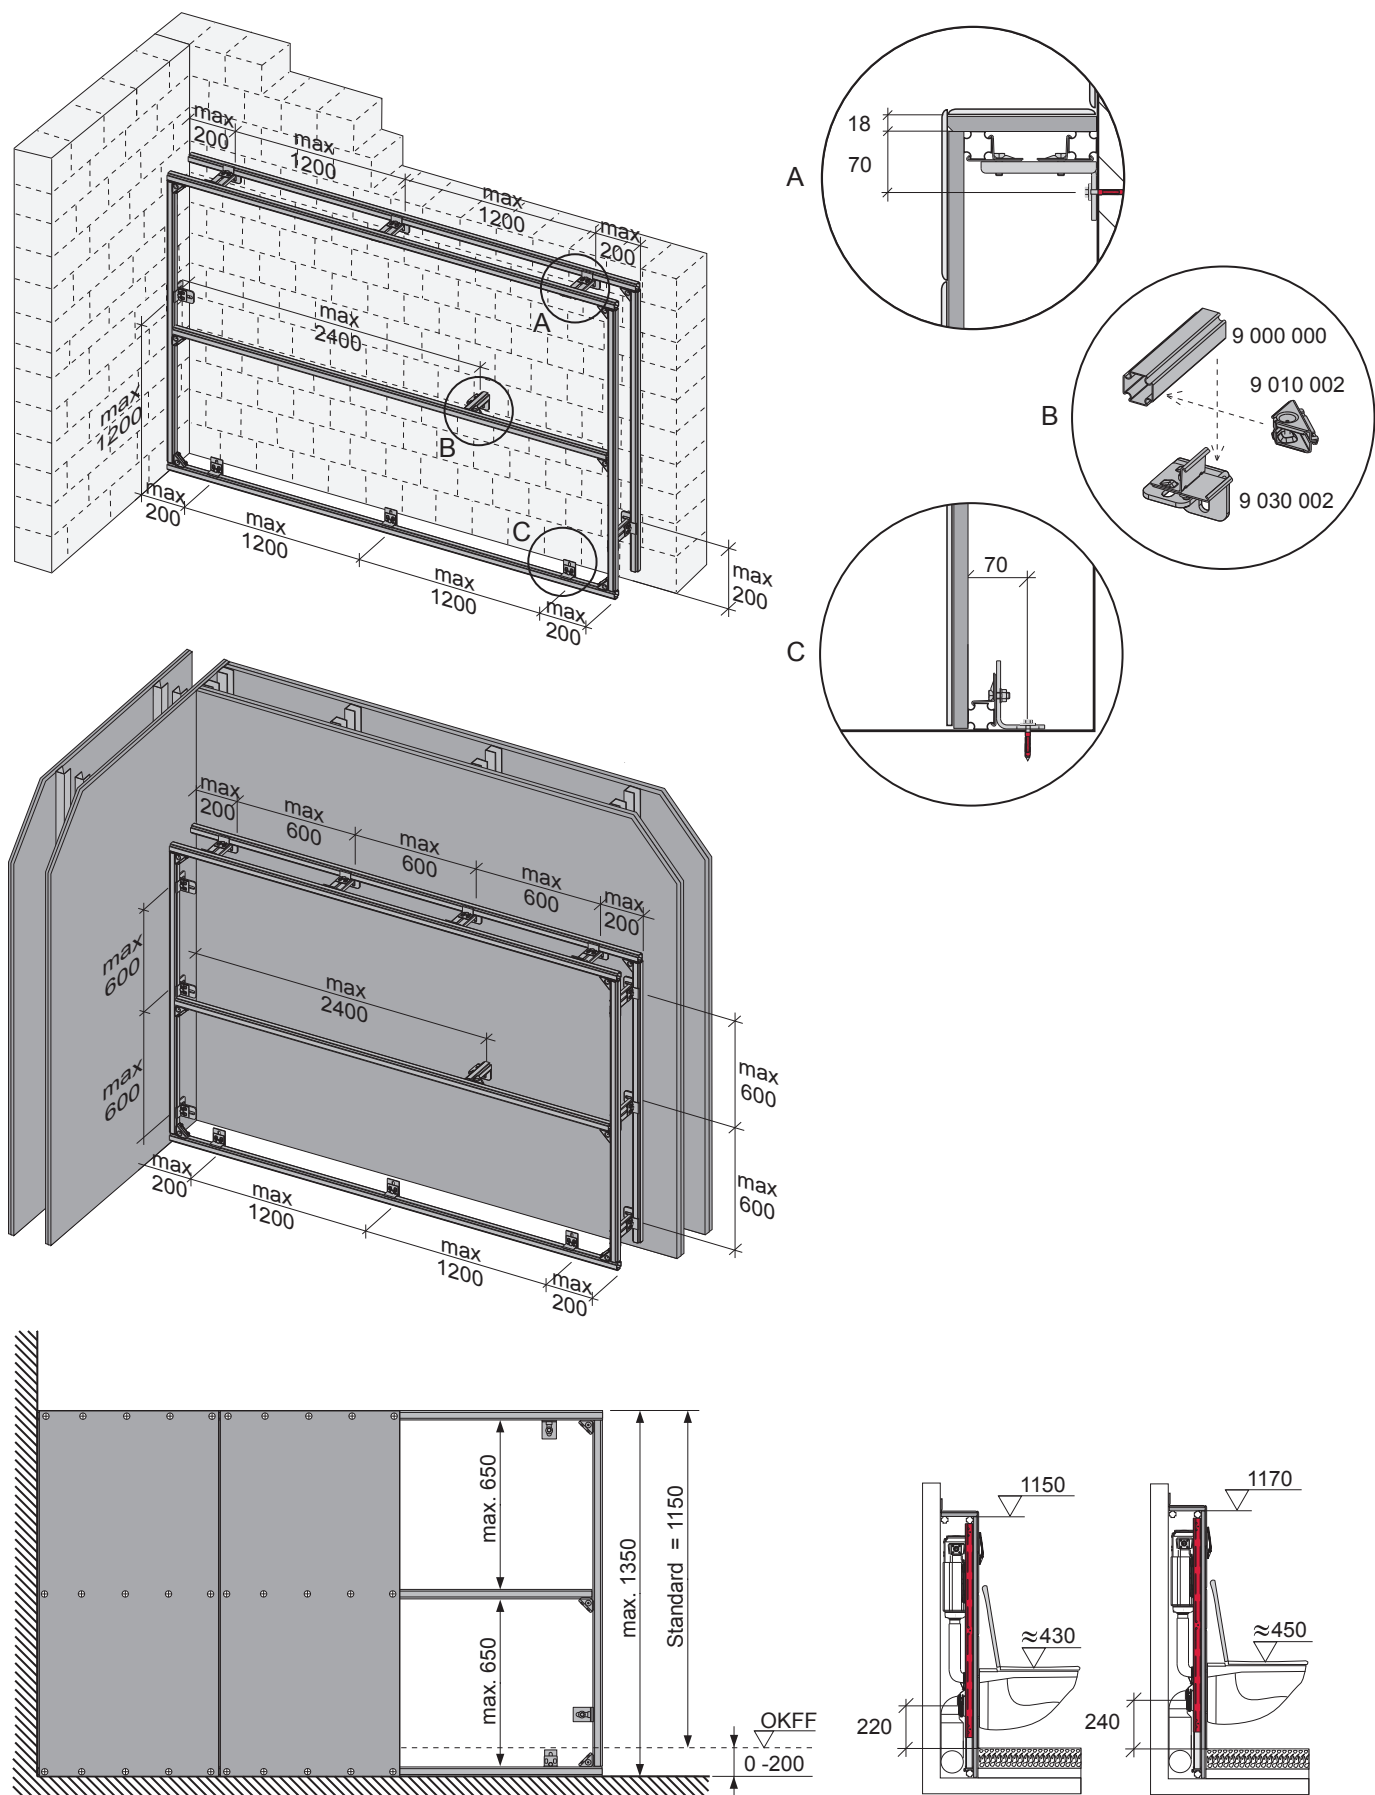


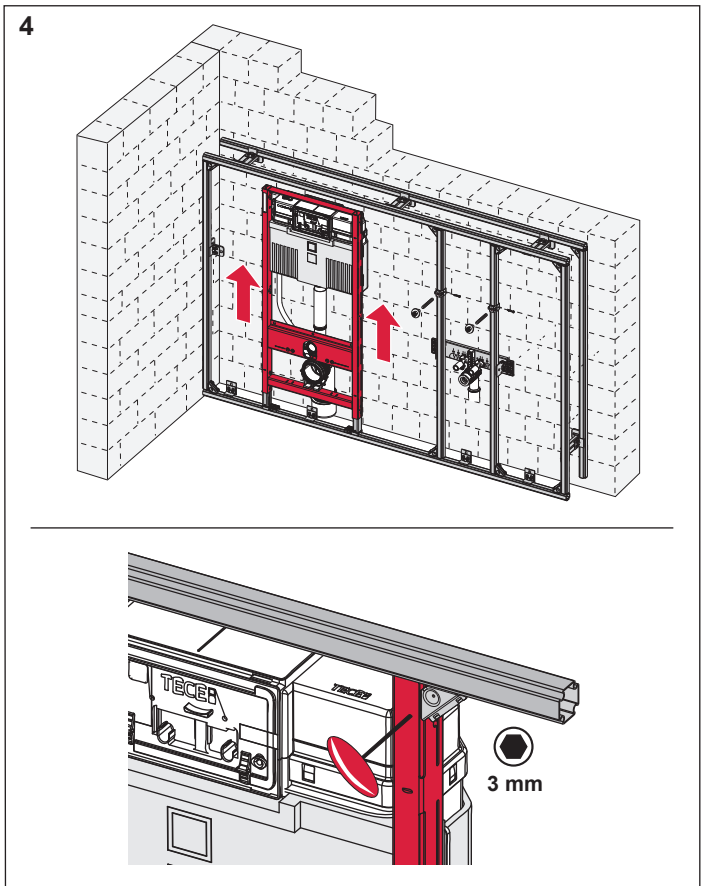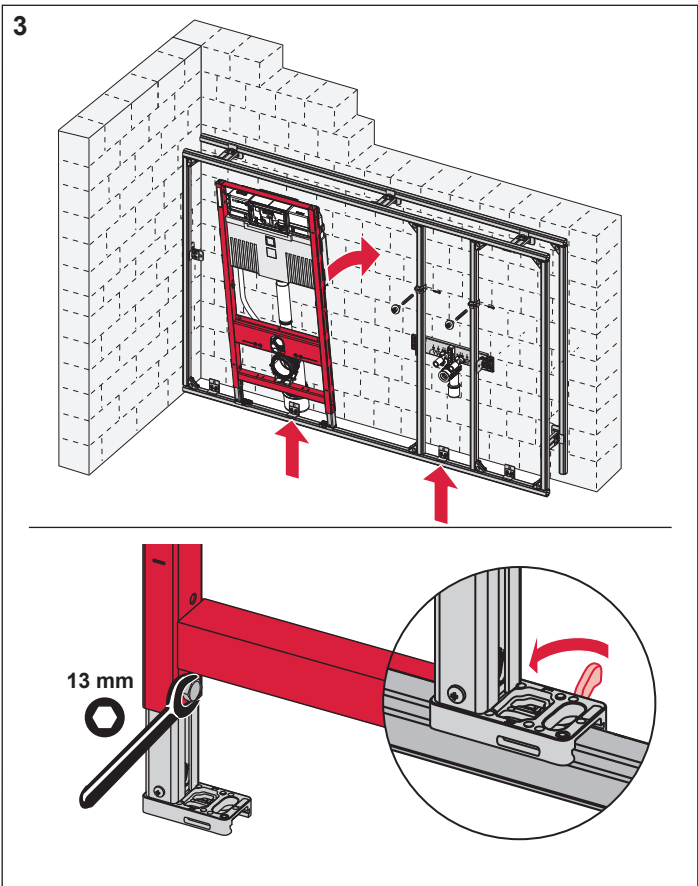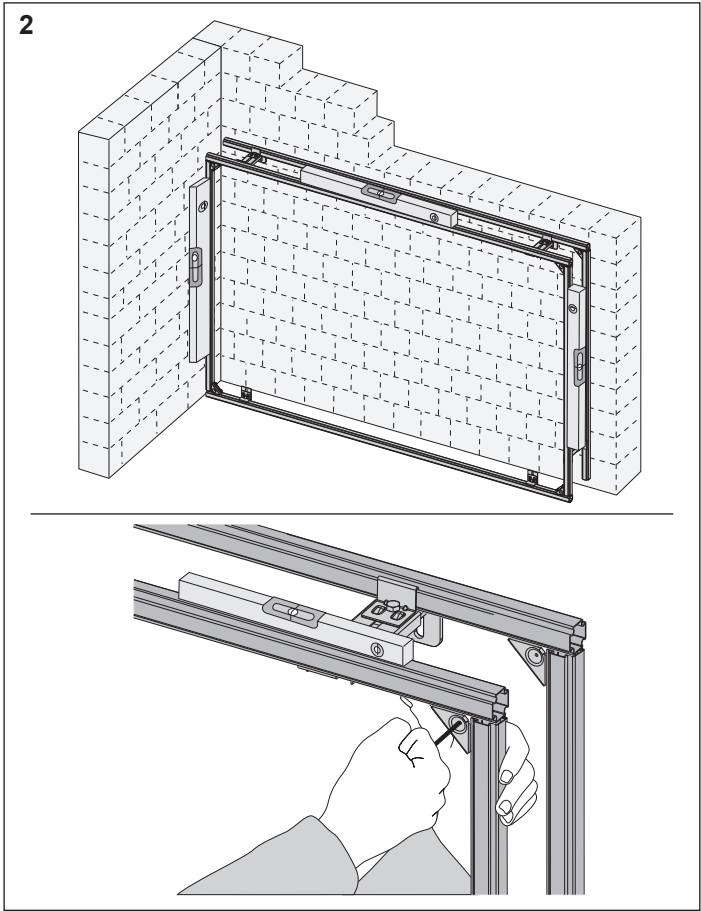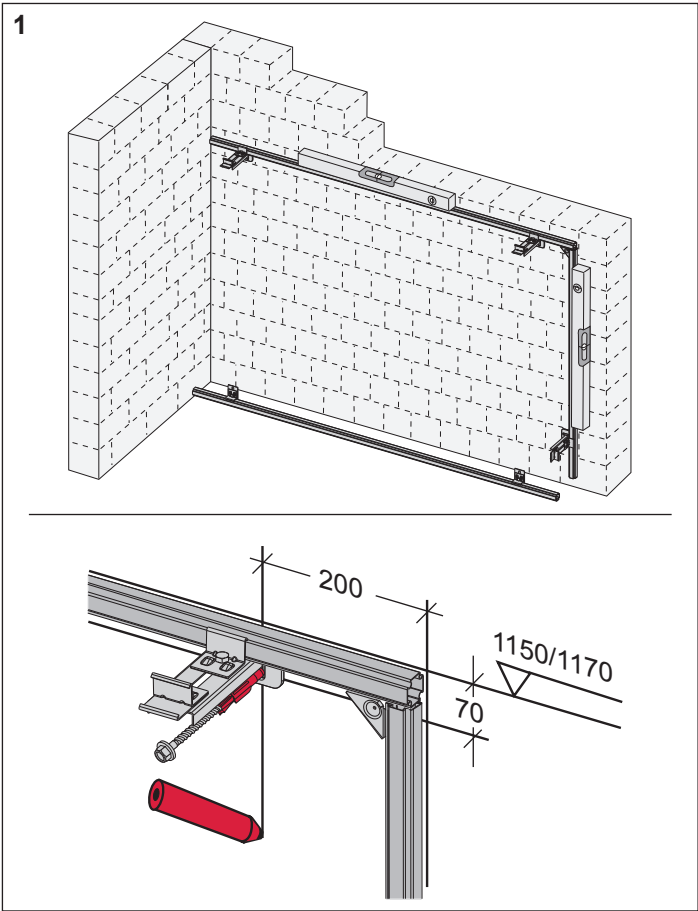


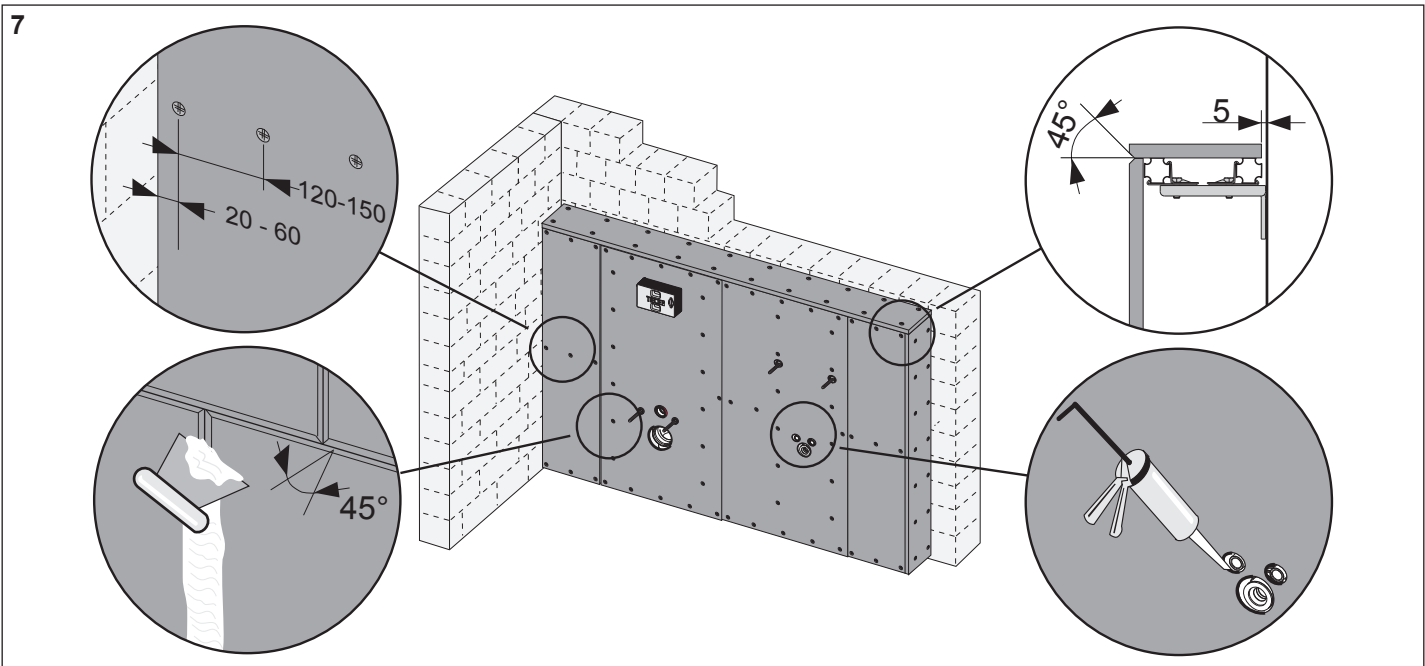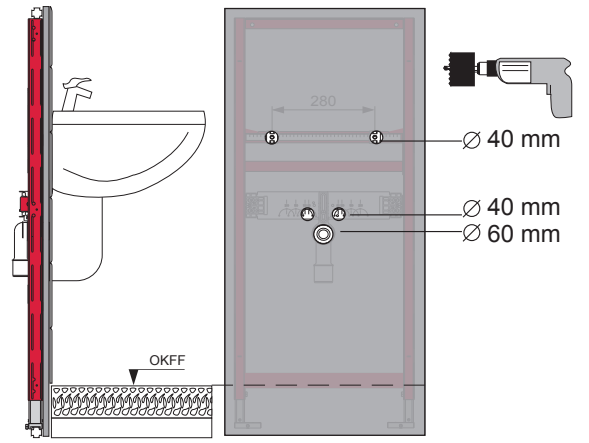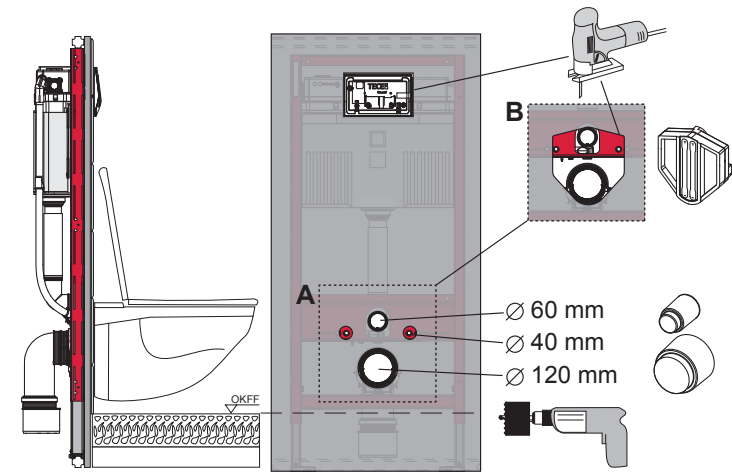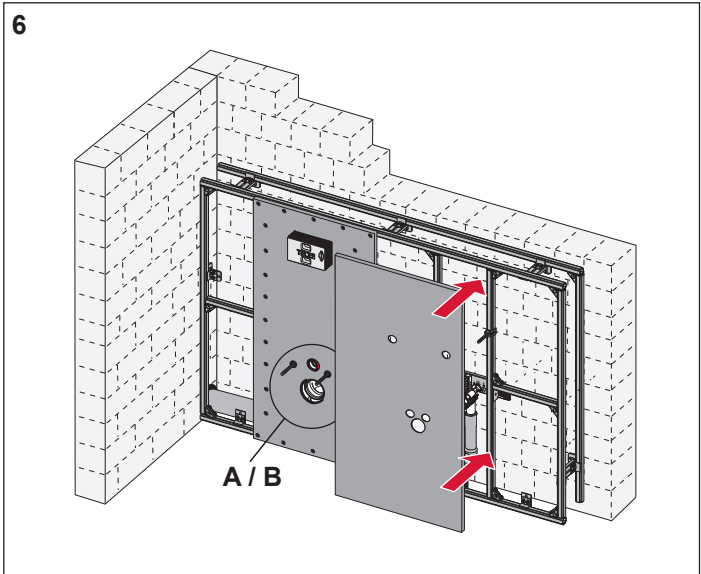
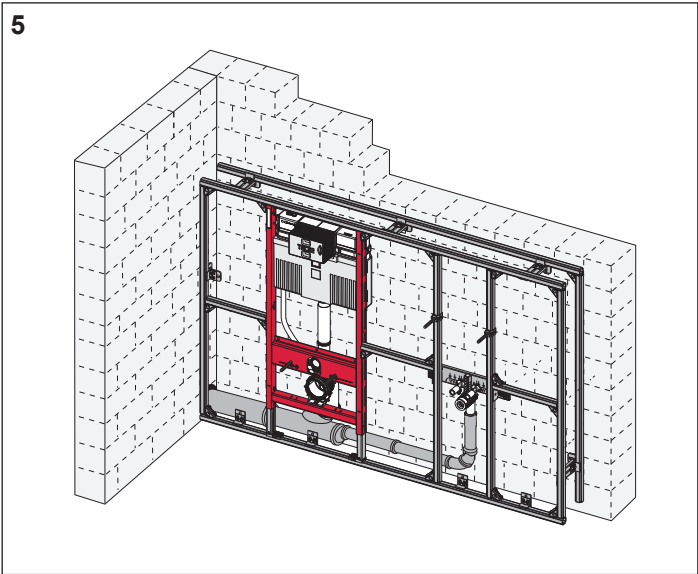


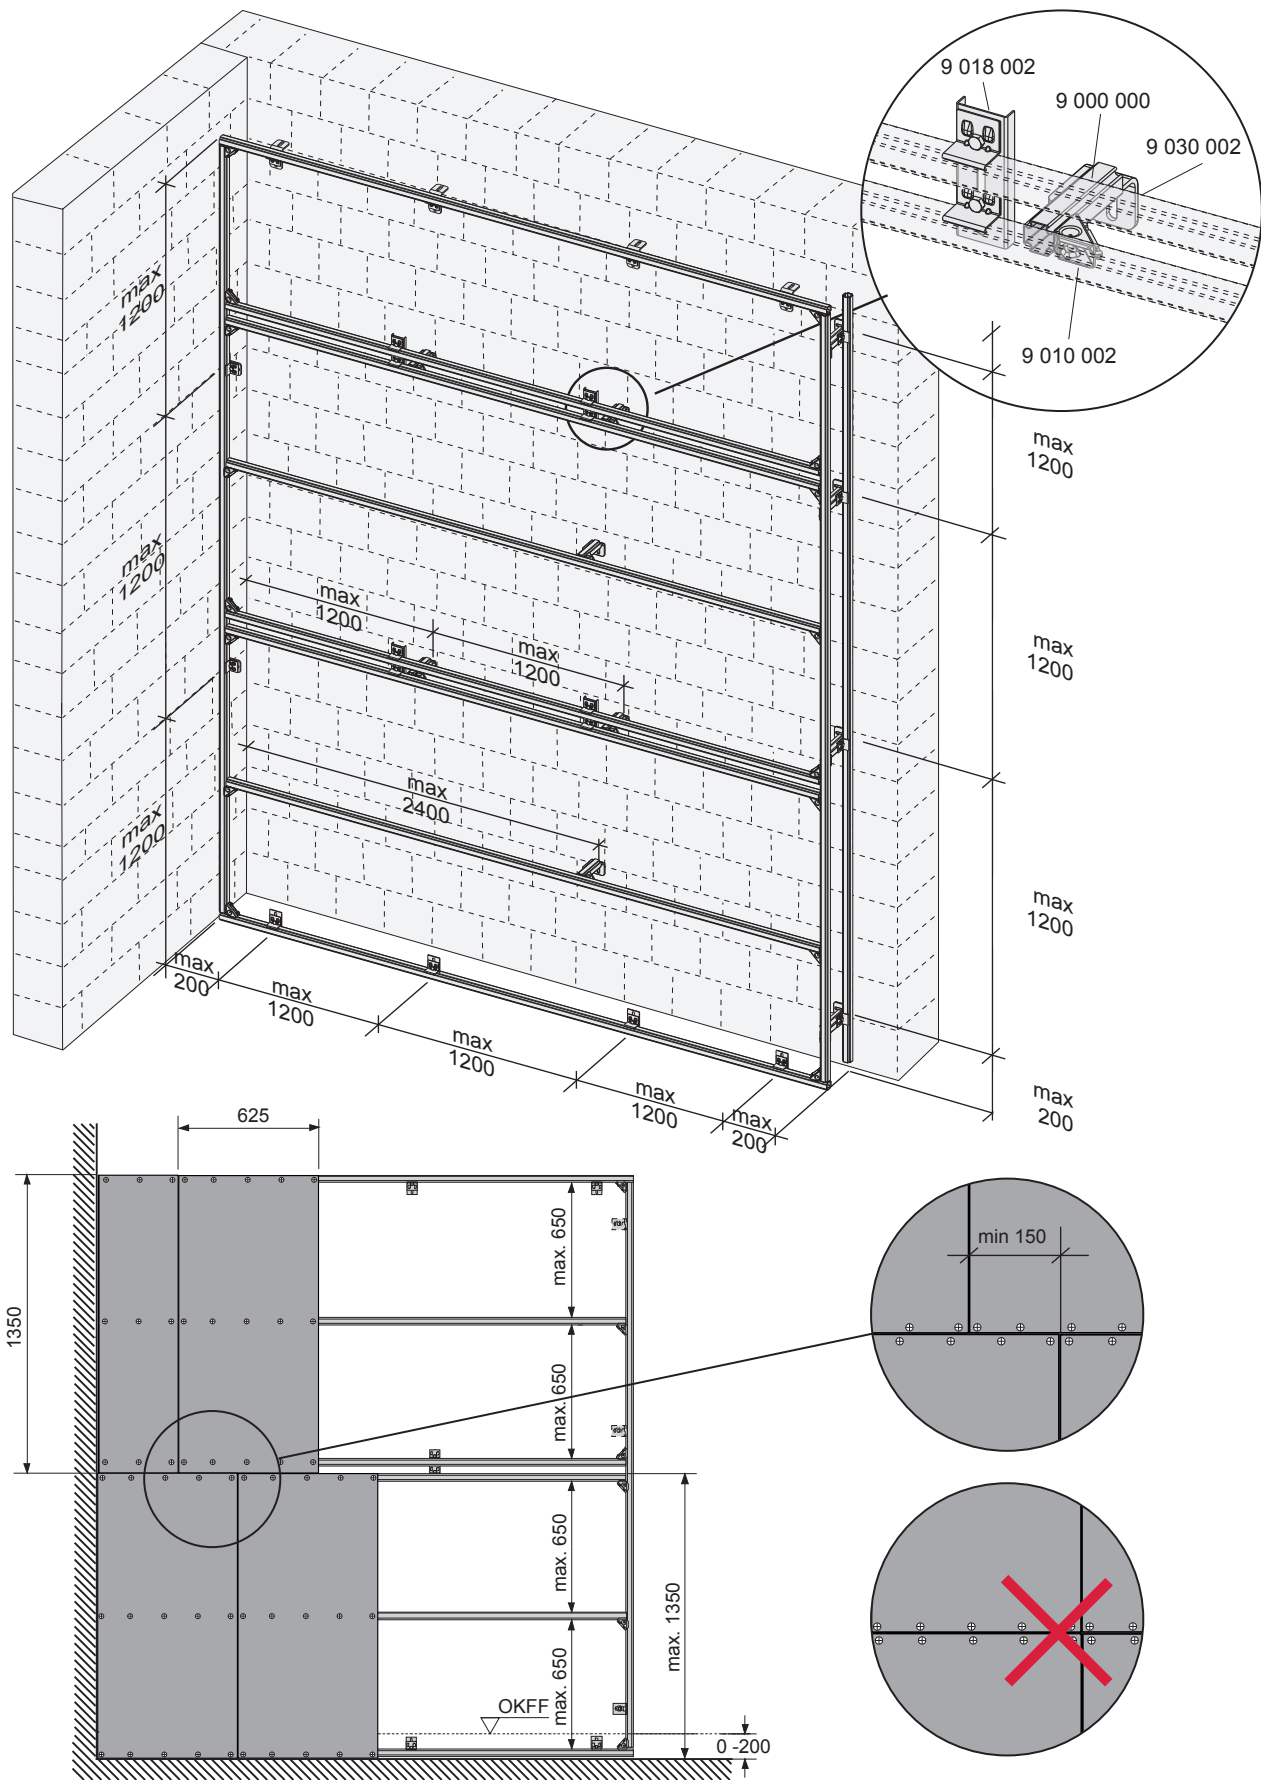

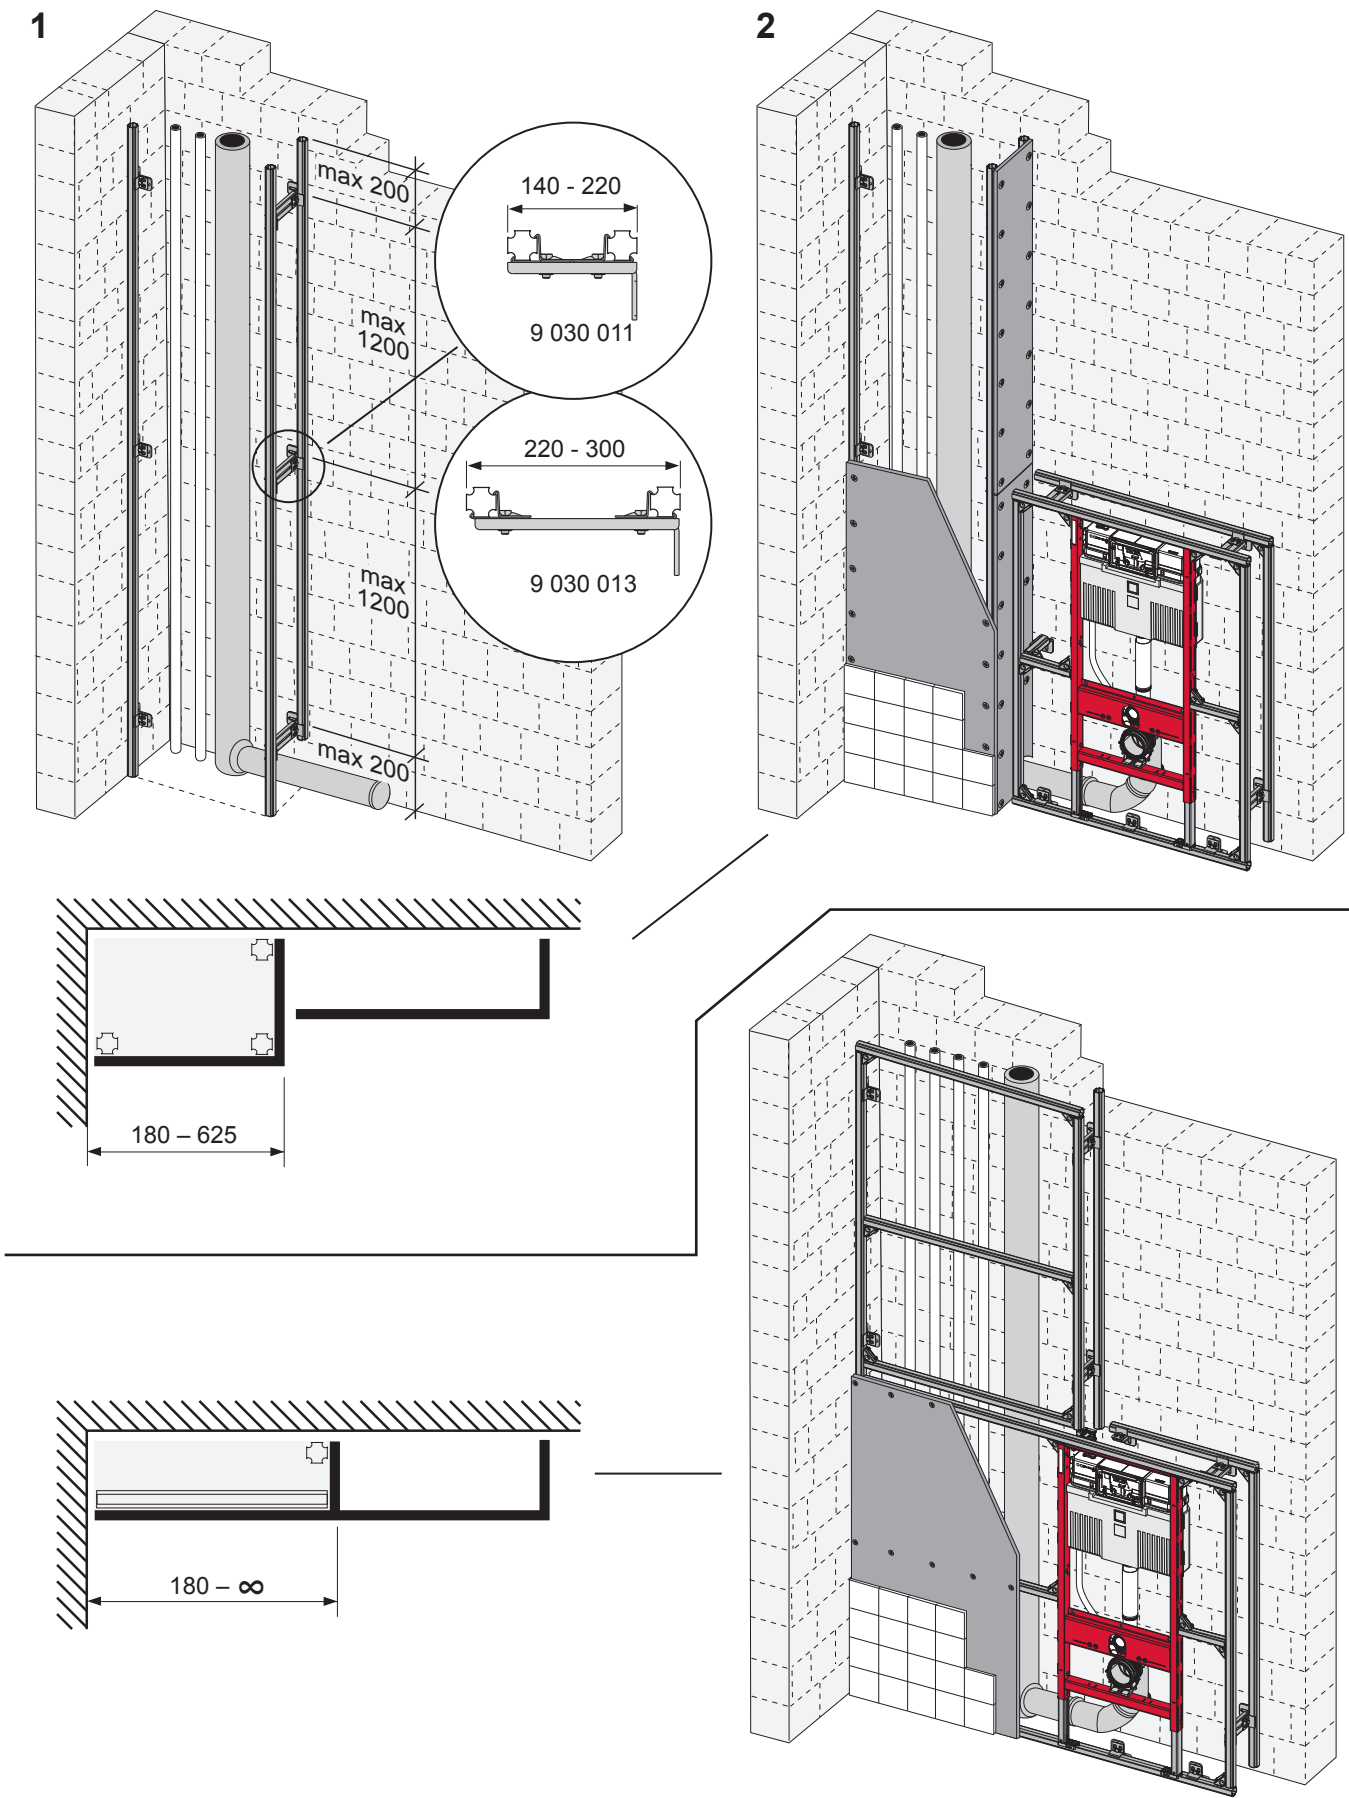

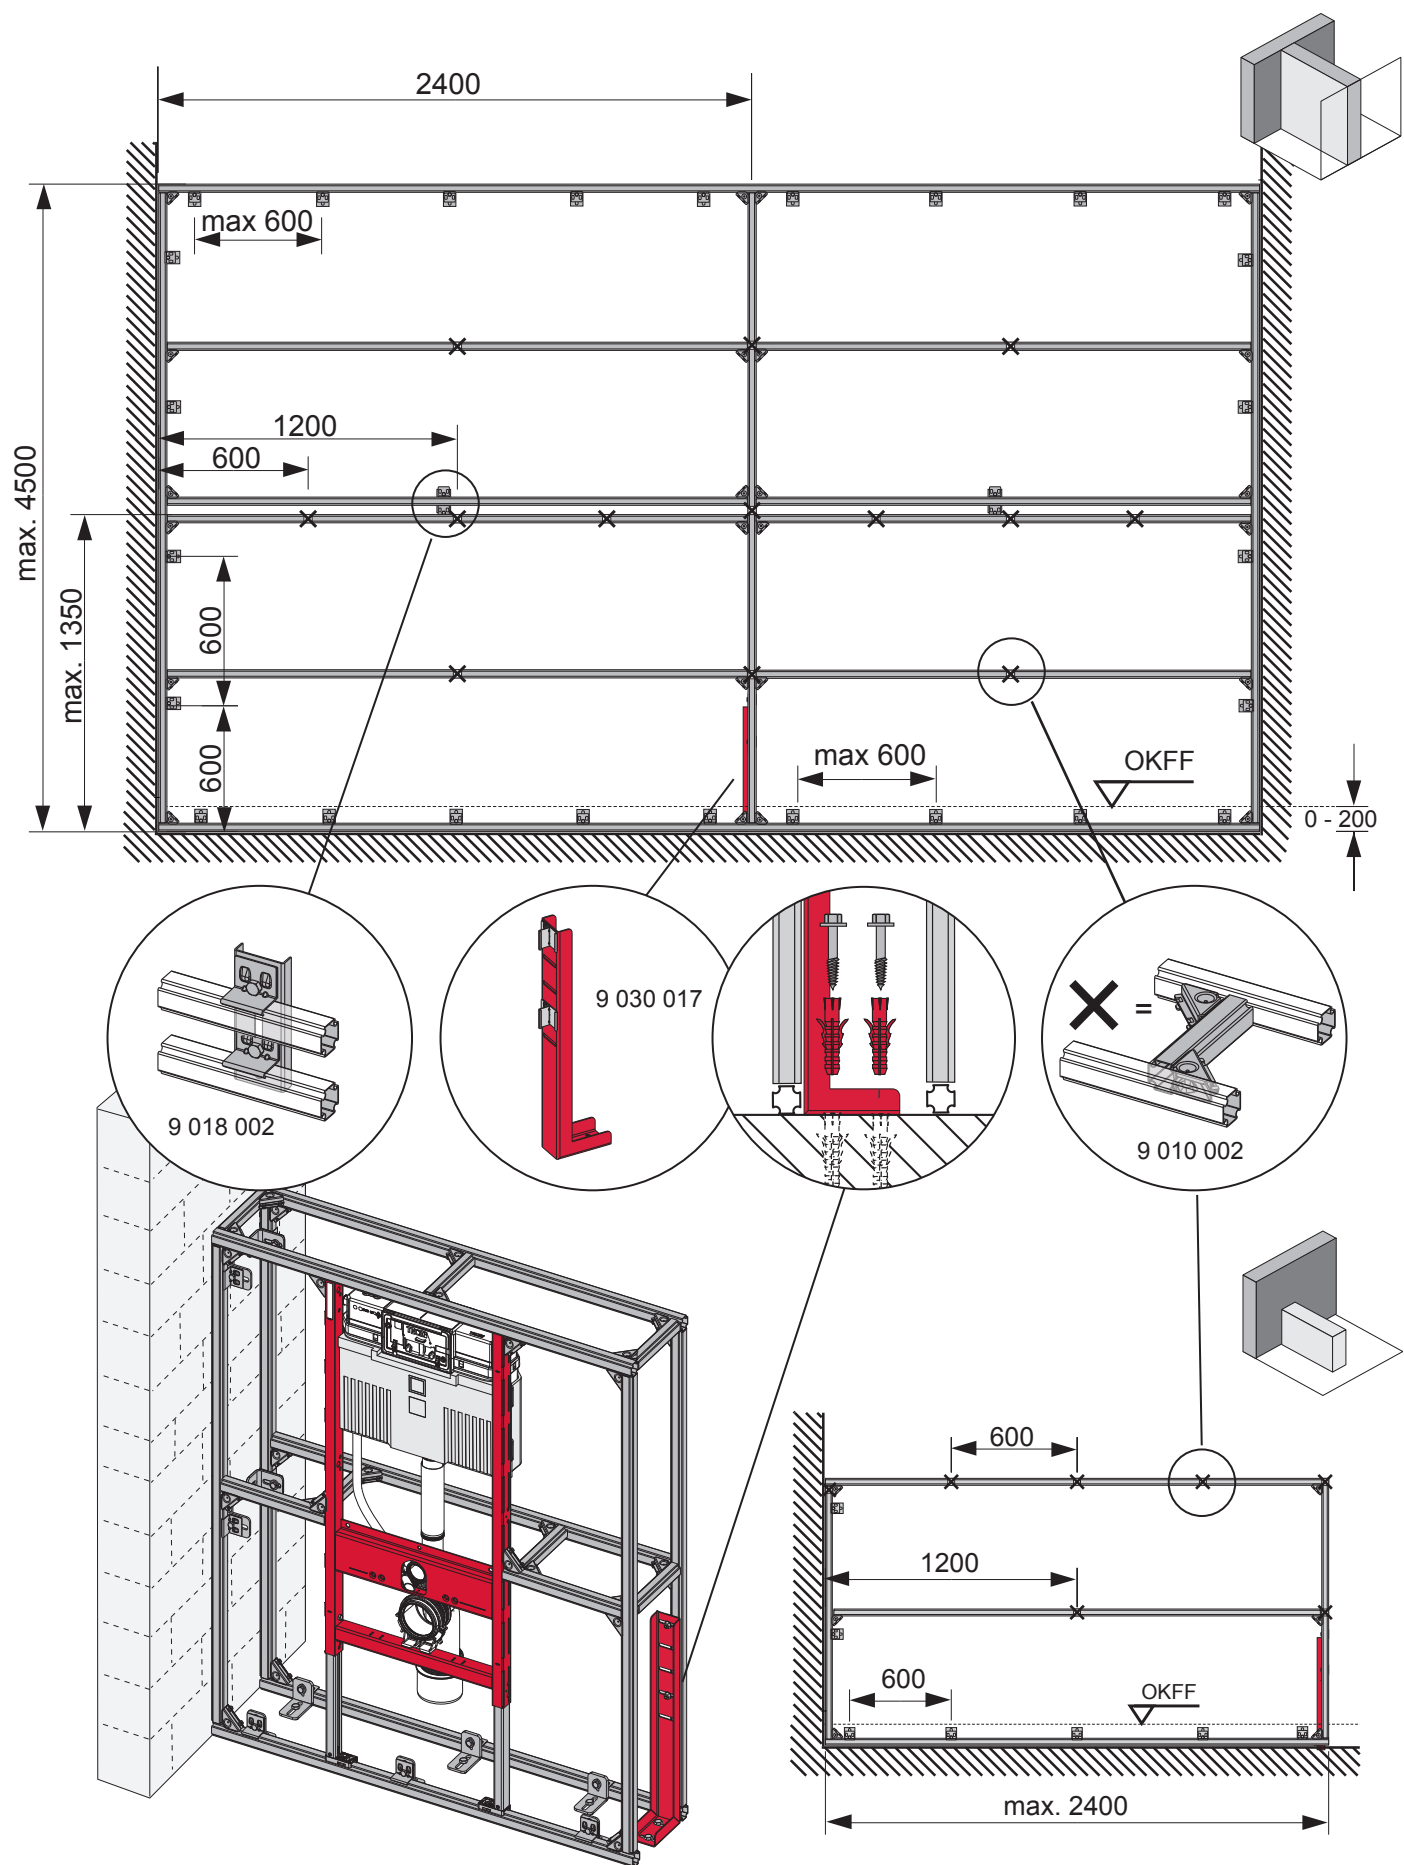

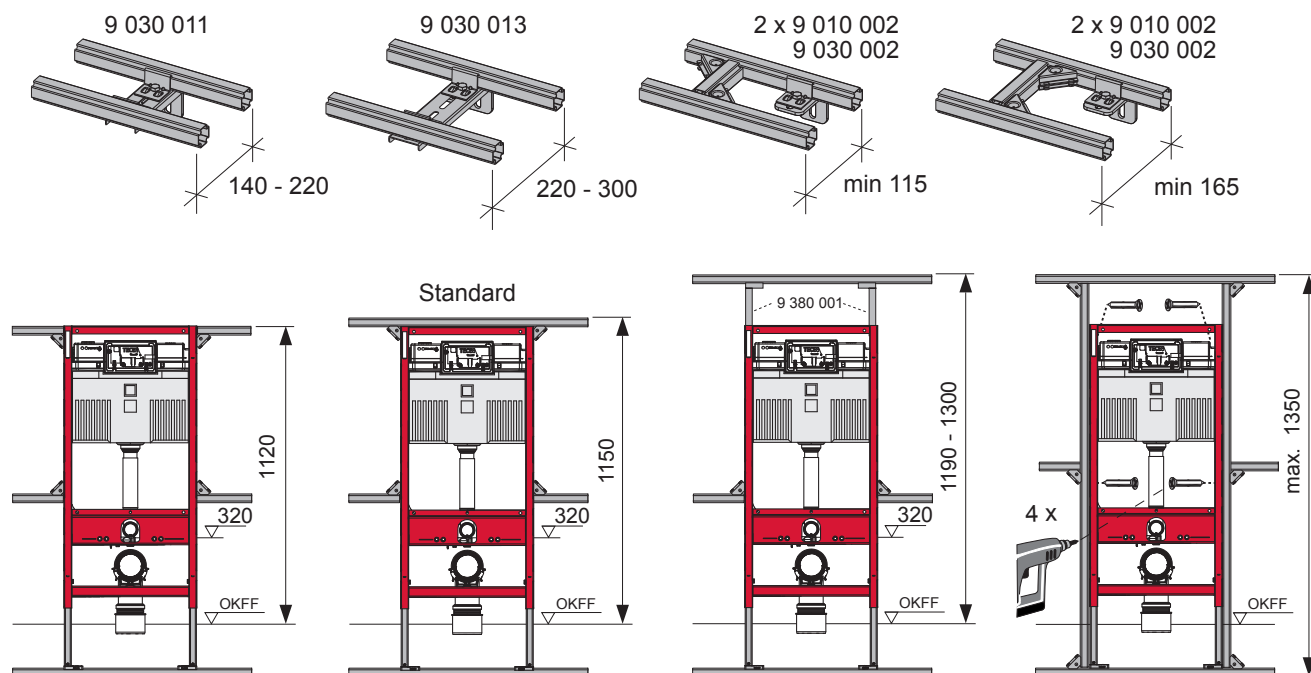

	Art. Nr.	H Standard	T1 min	T2 min
 O DN 100	9 300 300	1150 (1120 - 1350)	160	210
	9 300 303			
	9 300 309			
	9 300 344			
	9 300 100 (...)			
 O DN 50	9 300 322	980 - 1080	160	210
	9 300 301	820 - 920	160	210
	9 041 306	970 - 1350	160	210
	9 310 000	1150 (1120 - 1350)	140 (115)	210
	9 310 004			
 O DN 50	9 020 033	820 - 1350	140 (115)	210
	9 020 018			
	9 020 034			
	9 320 002			
	9 320 000	1150 (1120 - 1350)	140 (115)	170
 O DN 50	9 320 001			
	9 020 017			
 O DN 50	9 330 000	1150 (1120 - 1350)	140 (115)	210

